






TANK DIVIDERS - SILICONE INSTALL

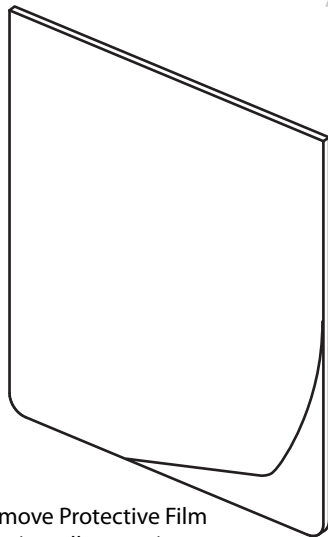

Remove Protective Film
(usually paper)
After Test Fitting

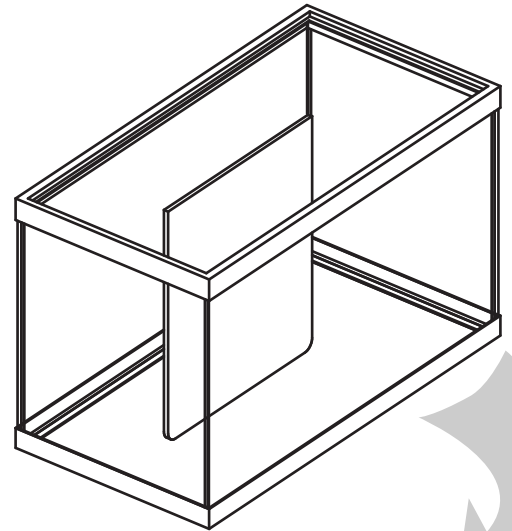

Silicone seal around side
and bottom edges
front and back

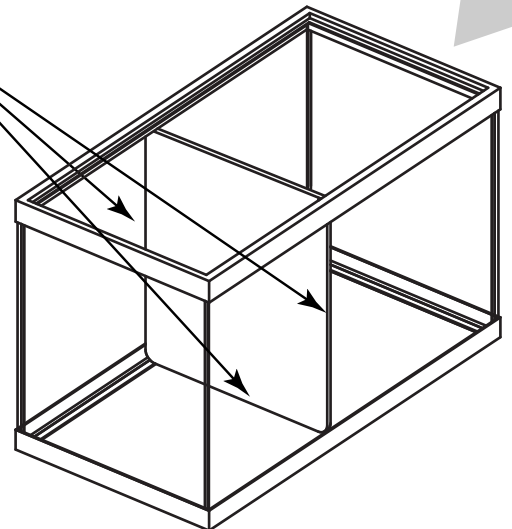

Thank you for choosing our Tank Dividers.

First, please inspect your new tank divider prior to proceeding. If anything is missing or damaged in shipping please contact us ASAP for a replacement. Our contact info is below, or you can contact us through our Ebay store at <https://www.ebay.com/str/marinebiosystems>.

If everything looks good then test fit the divider in your tank before removing the protective film. If everything fits up well then remove the protective film and install.

To install, drop the divider into the tank and rotate it into place. Once in place, seal around the front and back edges with aquarium safe silicone. To hold the divider in place while you silicone you can use a dab or two of cyanoacrylate glue (super glue, corafix, etc.) along the bottom edge. Allow 24 hours to cure before adding water. "Aquarium Safe" silicone can be purchased from most aquarium stores and many of the major online retailers who stock aquarium supplies. 100% pure silicone like GE Type I from the local big box stores is also considered "Aquarium safe". Do not use any silicone with additives like anti-fungal agents (GE Type II or similar).

Due to variations in tank manufacturing there will be a gap between the glass and the divider when it is installed perpendicular to the walls and bottom. This is perfectly normal. That gap should not exceed 1/8" along any edge. If you feel the gap is too wide for your application please contact us and we'll work with you to correct the issue.

**If you need any other acrylic products for your aquarium we welcome you to shop at
<https://www.ebay.com/str/marinebiosystems> or contact us directly.
We offer a wide variety of products and build custom items to order.**